



**DESIGN & CONSTRUCTION GROUP  
THE GOVERNOR NELSON A. ROCKEFELLER  
EMPIRE STATE PLAZA  
ALBANY, NY 12242**

---

**ADDENDUM NO. 1 TO PROJECT NO. 47450**

**CONSTRUCTION WORK  
REPAIR/REPLACE PAVEMENT  
STATE ARMORY  
321 MANOR ROAD  
STATEN ISLAND, NY**

June 16, 2023

<b>NOTE:</b> This Addendum forms a part of the Contract Documents. Insert it in the Project Manual. Acknowledge receipt of this Addendum in the space provided on the Bid Form.
---

**CONSTRUCTION DRAWINGS**

1. Revised Drawings:
  - a. Drawing Nos. C-120 and C-121, noted "ADDENDUM #1 6/16/2023" accompany this Addendum and supersede the same numbered originally issued drawings.

**END OF ADDENDUM**

Brady M. Sherlock, P.E.  
Director, Division of Design  
Design & Construction



SITE PLAN NOTES:

- 1

PROVIDE STONED LANDSCAPING IN AREAS SHOWN PER DETAIL. TOTAL AREA OF ALL SHEETS = 5,540± SF
- 2

PROVIDE CONCRETE PAD AS PER DETAIL.
- 3

FULL DEPTH ASPHALT LIGHT DUTY PAVEMENT; PROVIDE FULL DEPTH LIGHT DUTY ASPHALT PAVEMENT AS PER DETAIL.
- 4

FULL DEPTH ASPHALT HEAVY DUTY PAVEMENT; PROVIDE FULL DEPTH HEAVY DUTY ASPHALT AS PER DETAIL.
- 5

PROVIDE CONCRETE BOLLARD AS PER DETAIL.
- 6

BLEND WORK SMOOTHLY AND EVENLY INTO EXISTING PAVEMENT/CONCRETE SIDEWALK.
- 7

PROTECT EXISTING FENCE DURING CONSTRUCTION. REPAIR/REPLACE ANY DAMAGE.
- 8

PROVIDE TOPSOIL AND SEEDING FOR LAWN AREA.
- 9


RE-INSTALL SALVAGED FRAME AND COVER/GRATE AND SET ELEVATION TO BE FLUSH WITH PAVEMENT.
- 10

RE-INSTALL GATES, FENCING FABRIC AND TENSION WIRE/RODS ONTO EXISTING FENCE POSTS THAT REMAIN.
- 11

PARKING AREA TO BE RE-STRIPED ONCE PAVING HAS BEEN COMPLETED. REFER TO LAYOUT, PARKING AND STRIPING PLAN DRAWINGS.
- 12

EXISTING GATE TO REMAIN. COORDINATE WITH DIRECTOR'S REPRESENTATIVE RELATED TO GATE OPERATIONS TO COMPLETE PAVING WORK.

KEY MAP

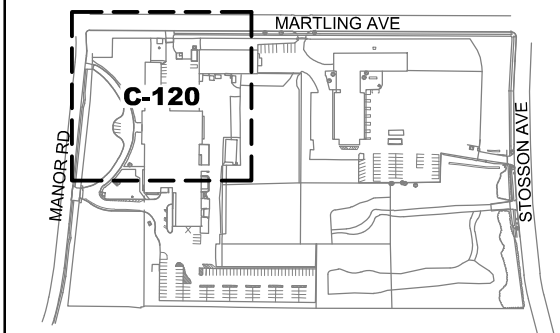

SITE PLAN LEGEND:

- 3

C-500

DETAIL NUMBER

DETAIL REFERENCE


DRAWING NUMBER
- 1

1
- NUMBERED CALLOUT AND NOTE REFERENCE
- CLL
- CONTRACT LIMIT LINE
- 
- SILT FENCE
- 
- LIMITS OF PAVEMENT/LANDSCAPE AREA
- 
- AREA OF NEW FULL DEPTH LIGHT DUTY ASPHALT CONSTRUCTION AS PER PAVEMENT SECTION
- 
- AREA OF TOPSOIL AND SEEDING
- 
- AREA OF FULL DEPTH STABILIZED HEAVY DUTY ASPHALT CONSTRUCTION AS PER PAVEMENT SECTION
- 
- CONCRETE SECTION OR SIDEWALK AREA
- 
- AREA OF NEW GRAVEL

SITE PLAN GENERAL NOTES:

1. RETURN ALL DISTURBED AREAS TO THEIR EXISTING COVER TYPES UPON CONSTRUCTION COMPLETION UNLESS OTHERWISE SPECIFIED.
2. LOCATE AND VERIFY THE EXACT LOCATION AND DEPTH OF THE EXISTING GAS MAINS, STORM PIPES AND ALL OTHER UTILITIES POTENTIALLY IN THE PROJECT AREA IN FIELD PRIOR TO CONSTRUCTION PER SPECIFICATION SECTION 023313. NOTIFY DIRECTOR'S REPRESENTATIVE IF LOCATION CONFLICTS WITH LAYOUT.
3. INSTALL SEDIMENT CONTROLS PRIOR TO ANY REMOVAL ACTIVITIES.
4. MAINTAIN EMERGENCY ACCESS TO BUILDINGS AT ALL TIMES.
5. REPAIR ANY DAMAGE TO EXISTING FENCE OR GATES.
6. SEE DRAWING C-101 FOR WORK AREA LIMITS AND SEQUENCING NOTES.

GRAPHIC SCALE

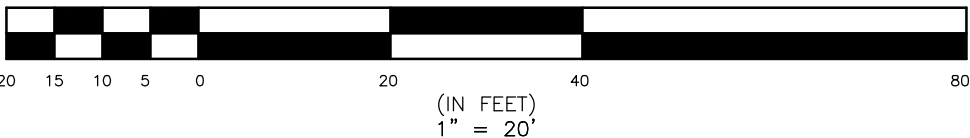

DESIGN & CONSTRUCTION


CONSULTANT: ENVIRONMENTAL DESIGN PARTNERSHIP, LLP

CERTIFICATE OF AUTHORIZATION #: 037711



WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS "A" MISDEMEANOR.

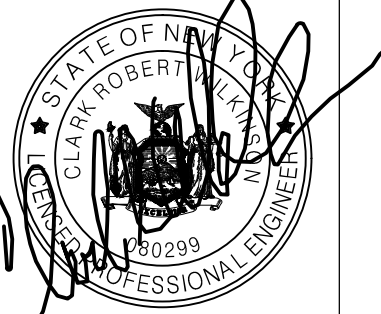

REGISTRATION EXPIRES: 03/31/2026

CONTRACT:

TITLE:

REPAIR/REPLACE PAVEMENT

LOCATION:

STATE ARMY  
321 MANOR ROAD  
STATEN ISLAND, NY

CLIENT:

NEW YORK STATE DIVISION OF  
MILITARY AND NAVAL AFFAIRS


CRW	06/16/2023	ADDENDUM #1
CRW	03/24/2023	100% SUBMISSION
MARK	DATE	DESCRIPTION
PROJECT NUMBER:	47450	- C
DESIGNED BY:	DBR	
DRAWN BY:	DBR	
FIELD CHECK:	CRW	
APPROVED:	BPO	

SHEET TITLE:


SITE PLAN

DRAWING NUMBER:

C-120

SHEET 9 OF 28



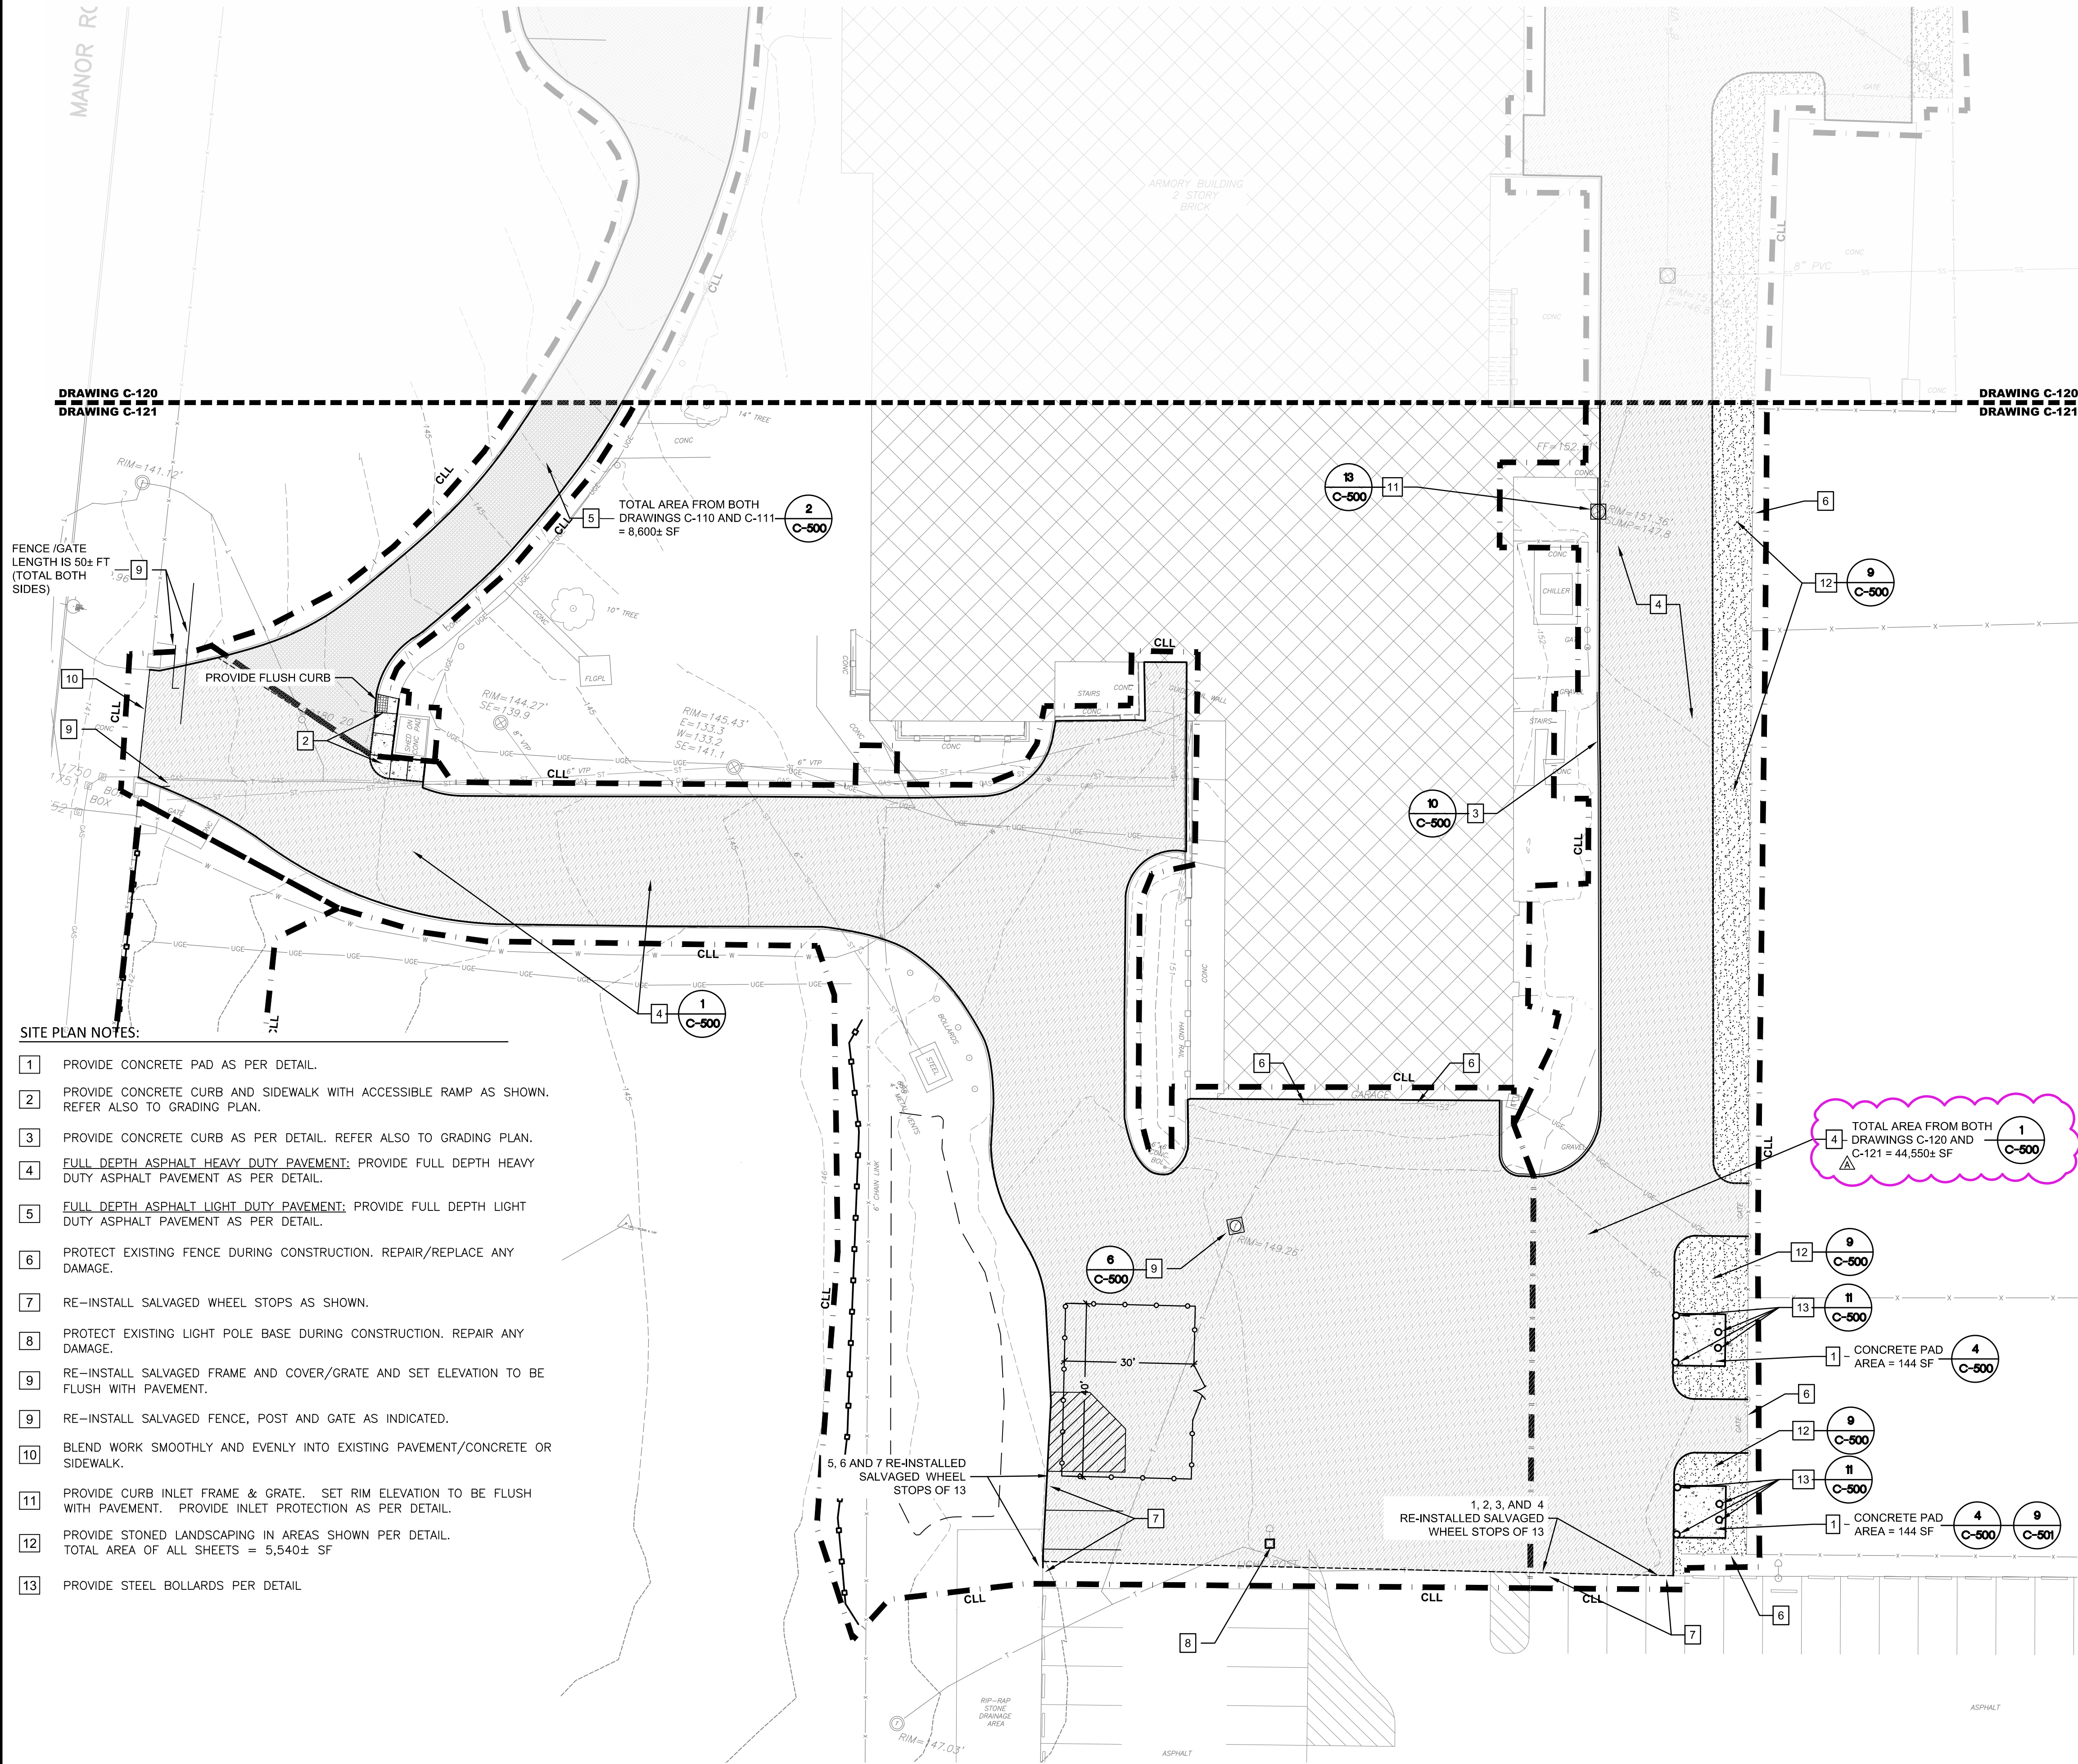


SITE PLAN NOTES:

- 1 PROVIDE CONCRETE PAD AS PER DETAIL.
- 2 PROVIDE CONCRETE CURB AND SIDEWALK WITH ACCESSIBLE RAMP AS SHOWN. REFER ALSO TO GRADING PLAN.
- 3 PROVIDE CONCRETE CURB AS PER DETAIL. REFER ALSO TO GRADING PLAN.
- 4 FULL DEPTH ASPHALT HEAVY DUTY PAVEMENT; PROVIDE FULL DEPTH HEAVY DUTY ASPHALT PAVEMENT AS PER DETAIL.
- 5 FULL DEPTH ASPHALT LIGHT DUTY PAVEMENT; PROVIDE FULL DEPTH LIGHT DUTY ASPHALT PAVEMENT AS PER DETAIL.
- 6 PROTECT EXISTING FENCE DURING CONSTRUCTION. REPAIR/REPLACE ANY DAMAGE.
- 7 RE-INSTALL SALVAGED WHEEL STOPS AS SHOWN.
- 8 PROTECT EXISTING LIGHT POLE BASE DURING CONSTRUCTION. REPAIR ANY DAMAGE.
- 9 RE-INSTALL SALVAGED FRAME AND COVER/GRATE AND SET ELEVATION TO BE FLUSH WITH PAVEMENT.
- 9 RE-INSTALL SALVAGED FENCE, POST AND GATE AS INDICATED.
- 10 BLEND WORK SMOOTHLY AND EVENLY INTO EXISTING PAVEMENT/CONCRETE OR SIDEWALK.
- 11 PROVIDE CURB INLET FRAME & GRATE. SET RIM ELEVATION TO BE FLUSH WITH PAVEMENT. PROVIDE INLET PROTECTION AS PER DETAIL.
- 12 PROVIDE STONED LANDSCAPING IN AREAS SHOWN PER DETAIL. TOTAL AREA OF ALL SHEETS = 5,540± SF
- 13 PROVIDE STEEL BOLLARDS PER DETAIL


SITE PLAN GENERAL NOTES:

1. RETURN ALL DISTURBED AREAS TO THEIR EXISTING COVER TYPES UPON CONSTRUCTION COMPLETION UNLESS OTHERWISE SPECIFIED.
2. LOCATE AND VERIFY THE EXACT LOCATION AND DEPTH OF THE EXISTING GAS MAINS, STORM PIPES AND ALL OTHER UTILITIES POTENTIALLY IN THE PROJECT AREA IN FIELD PRIOR TO CONSTRUCTION PER SPECIFICATION SECTION 023313. NOTIFY DIRECTOR'S REPRESENTATIVE IF LOCATION CONFLICTS WITH LAYOUT.
3. INSTALL SEDIMENT CONTROLS PRIOR TO ANY REMOVAL ACTIVITIES.
4. MAINTAIN EMERGENCY ACCESS TO BUILDINGS AT ALL TIMES.
5. REPAIR ANY DAMAGE TO EXISTING FENCE OR GATES.
6. SEE DRAWING C-101 FOR WORK AREA LIMITS AND SEQUENCING NOTES.

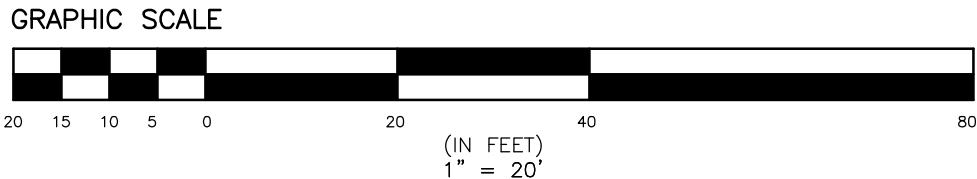

SITE PLAN LEGEND:

- DETAIL NUMBER (circle with number)
- DETAIL REFERENCE (line to detail)
- DRAWING NUMBER (circle with drawing number)
- NUMBERED CALLOUT AND NOTE REFERENCE (numbered box)
- CONTRACT LIMIT LINE (thick dashed line)
- TEMPORARY CONSTRUCTION FENCE (line with cross-ticks)
- SILT FENCE (line with cross-ticks)
- LIMITS OF PAVEMENT/LANDSCAPE AREA (thin dashed line)
- AREA OF NEW FULL DEPTH LIGHT DUTY ASPHALT CONSTRUCTION AS PER PAVEMENT SECTION (stippled pattern)
- AREA OF TOPSOIL AND SEEDING (dotted pattern)
- AREA OF FULL DEPTH STABILIZED HEAVY DUTY ASPHALT CONSTRUCTION AS PER PAVEMENT SECTION (cross-hatched pattern)
- CONCRETE SECTION OR SIDEWALK AREA (diagonal hatched pattern)

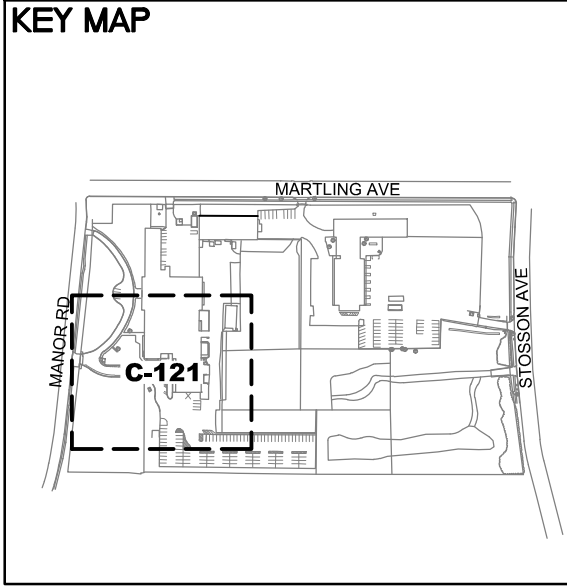

Office of General Services

DESIGN & CONSTRUCTION

CONSULTANT: ENVIRONMENTAL DESIGN PARTNERSHIP, LLP

CERTIFICATE OF AUTHORIZATION #: 037711

ENVIRONMENTAL DESIGN PARTNERSHIP, LLP.

edpllp.com

WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS "A" MISDEMEANOR.

REGISTRATION EXPIRES: 03/31/2026

CONTRACT:

TITLE: REPAIR/REPLACE PAVEMENT

LOCATION:

STATE ARMORY  
321 MANOR ROAD  
STATEN ISLAND, NY

CLIENT:

NEW YORK STATE DIVISION OF MILITARY AND NAVAL AFFAIRS

CRW	06/16/2023	ADDENDUM #1
CRW	03/24/2023	100% SUBMISSION
MARK	DATE	DESCRIPTION
PROJECT NUMBER:	47450	- C
DESIGNED BY:	CRW	
DRAWN BY:	DBR	
FIELD CHECK:	CRW	
APPROVED:	BPO	
SHEET TITLE:	SITE PLAN	
DRAWING NUMBER:	C-121	
SHEET	10	OF 28